

## EXTRACTABLE HEAT EXCHANGER

### FINNED COPPER COIL EXCHANGERS



Code	Surface mq <sup>2</sup>	Coil diam. mm	Length mm	Connections	Centres mm	Sanitank capacity
<b>S37000A</b>	0,76	140	380	3/4" M	75	200
<b>S37100A</b>	0,94	140	380	3/4" M	75	300
<b>S37200A</b>	1,53	170	450	3/4" M	75	500
<b>S37300A</b>	2,63	190	550	3/4" M	75	800
<b>S37400A</b>	3,17	190	650	3/4" M	75	1000/1500
<b>S37500A</b>	4,54	190	750	1" M	90	2000/2500
<b>S37600A</b>	5,26	190	820	1" M	90	3000
<b>S37700A</b>	6,34	190	970	1" M	90	4000/5000

### STAINLESS STEEL TUBULAR EXCHANGERS



Code	Surface m <sup>2</sup>	Plate diam. mm	Length mm	Connections	Centres mm	Sanitank capacity
<b>S35000A</b>	0,75	300	440	1" F	120	200/300
<b>S35100A</b>	1,00	300	520	1" F	120	500
<b>S35200A</b>	2,00	380	600	2" F	145	800
<b>S35300A</b>	3,00	380	710	2" F	145	1000/1500
<b>S35400A</b>	4,00	430	800	2" F	195	2000
<b>S35500A</b>	5,00	430	870	2" F	195	2500
<b>S35600A</b>	6,00	430	1000	2" F	195	3000
<b>S35700A</b>	8,00	430	1390	2" F	195	4000
<b>S35800A</b>	10,00	430	1550	2" F	195	5000

### COPPER TUBULAR EXCHANGERS




Code	Surface m <sup>2</sup>	Plate diam. mm	Length mm	Connections	Centres mm	Sanitank capacity
<b>S36000A</b>	0,75	300	440	1" F	120	200/300
<b>S36100A</b>	1,00	300	520	1" F	120	500
<b>S36200A</b>	2,00	380	600	2" F	145	800
<b>S36300A</b>	3,00	380	710	2" F	145	1000/1500
<b>S36400A</b>	4,00	430	800	2" F	195	2000
<b>S36500A</b>	5,00	430	870	2" F	195	2500
<b>S36600A</b>	6,00	430	1000	2" F	195	3000
<b>S36700A</b>	8,00	430	1390	2" F	195	4000
<b>S36800A</b>	10,00	430	1550	2" F	195	5000

## ACCESSORIES



### ELECTRONIC ANODE

Code	Model	Connection	Cylinder Capacity liters
<b>A27100A</b>	1 sonda	1/2"	100-500
<b>A27200A</b>	2 sonde	1/2"	800-5000

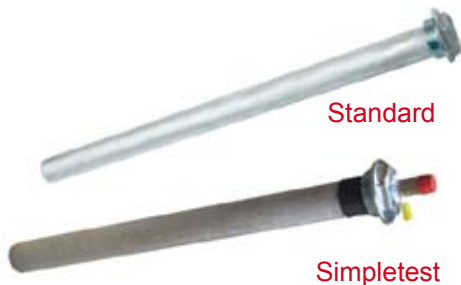

Standard

Simpletest

### MAGNESIUM ANODE

Code	Model	Lenght mm	Connection
<b>A25100A</b>	standard	500	1"1/4
<b>A25101S</b>	simpletest	500	1"1/4



### SENSOR HOUSING

Cod	Lenght mm	Connection
<b>A53000A</b>	75	1/2"
<b>A53100A</b>	125	1/2"



Standard Heater

### IMMERSION HEATER

Cod	Power KW	Tension V	Connection
<b>R25100A</b>	1,5	230	1"1/4
<b>R25200A</b>	2	230	1"1/4
<b>R25300A</b>	3	230	1"1/4
<b>R25400A</b>	4	230	1"1/4
<b>R25600A</b>	6	230	1"1/2
<b>R25900A</b>	9	230	1"1/2



Heater with thermostat 230V

### HEATER WITH THERMOSTAT

Cod	Power KW	Tension V	Connection
<b>R25101A</b>	1,5	230	1"1/4
<b>R25201A</b>	2	230	1"1/4
<b>R25301A</b>	3	230	1"1/4
<b>R25451A</b>	4,5	400	1"1/2
<b>R25601A</b>	6	400	1"1/2
<b>R25901A</b>	9	400	1"1/2
<b>R26201A</b>	12	400	1"1/2
<b>R26501A</b>	15	400	1"1/2



Heater with thermostat 400V